

AHD 1115 F

Displays with Touchscreen and Foil Front



- **Displays with touchscreen and bonded foil front**
- **All in one solution for quick installation – saves space and costs**
- **Can also be integrated into existing systems**
- **Completely redeveloped**

Böning Automationstechnologie's new generation of displays expands its product range in the display category with innovative devices.

Combining increased performance and functionality in a valuable modern design, they increase operational safety and ease of operation on ship bridges. Their luminosity of up to 1000 cd/m² ensures good readability at all times, even during bright sunlight. Automatic dimming further ensures that the displays operate without glare especially when cruising at night.

Automotive components allow the displays to be used in greater temperature ranges than previous displays.

The newest-generation capacitive touchscreen allows comfortable operation without visible threads.

Basic functions such as selecting the video source and brightness control can be quickly accessed with the built-in buttons.


When connected to the CAN bus of the Böning system (AHD 1200 / AHD 1300) alarms are signaled and can be acknowledged.

They can be conveniently operated with the remote controls (AHD-DRM T and AHD-DRM R) or from an external PC – for example from the command chair on the bridge.

The latest display technology provides even more brilliant colors and a markedly increased viewing angle.

Their 24 V DC power supply makes these devices especially suitable for use on ships.

Dimensions

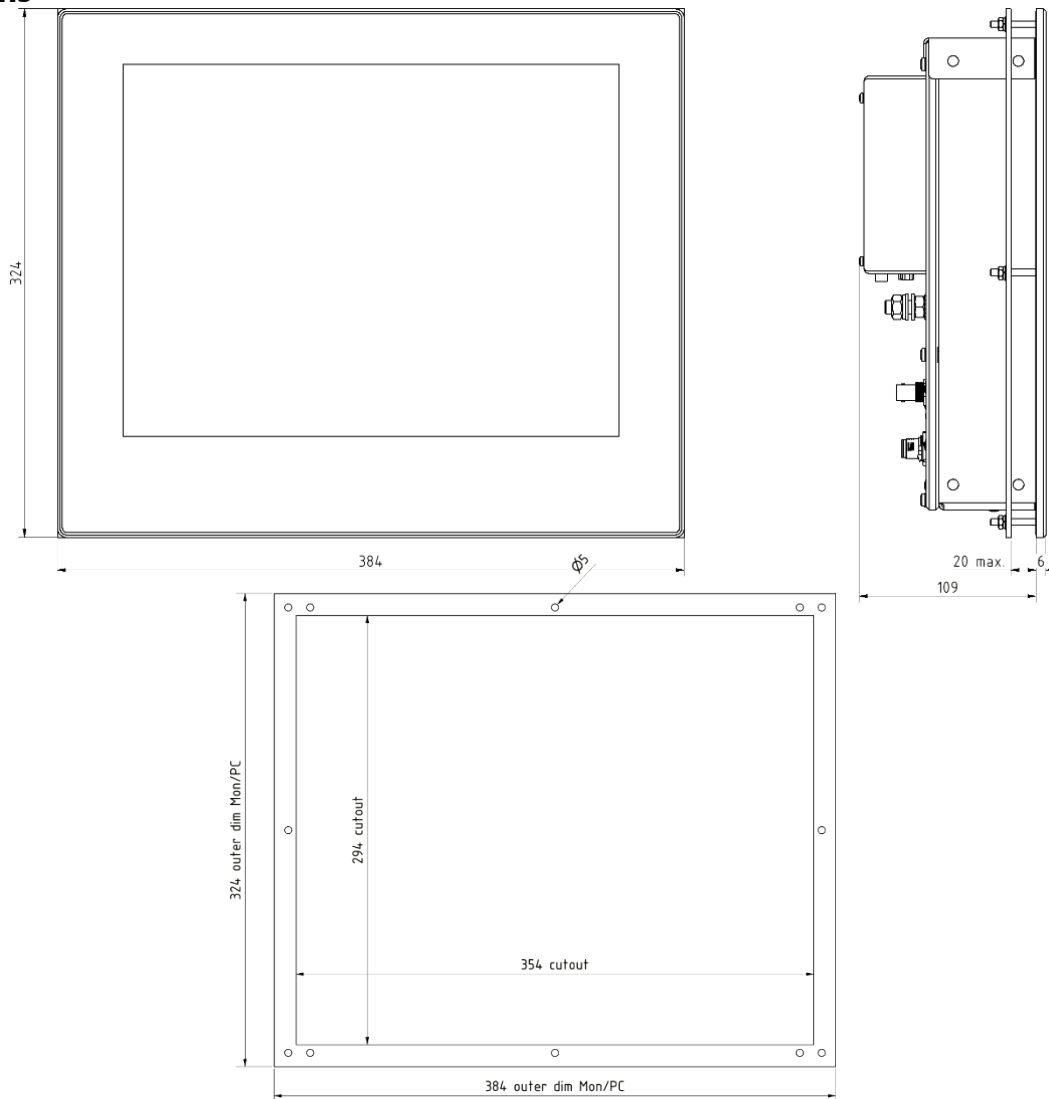

Technical Data

Power supply	24 V DC (+30% / -25%)	Interfaces	1 x CAN (Böning Remote Control Bus)
Power consumption	Ca. 40 W (24 V DC)		1 x RS 232 (for service purposes)
Ambient temperature	-30°C...+55°C (-30°C...+70°C at interior console temperature of max. +45°C)		1 x USB (for Touch Output, cannot be used with CAN)
Storage temperature	-50°C...+85°C		1 x Video IN (50 Hz, BNC)
Weight	Ca. 10 kg		2 x DVI IN
Protection class	IP 56 (frontside), IP 20 (rear side)		1 x VGA
Dimensions	384 x 324 x 115 mm	Resolution	1024 x 768 pixels (H x V; max., SVGA)
W x H x D	Installation depth min. 140 mm	Luminosity	1000 cd/m ²
Panel cutout (mm)	354 x 294 mm	Contrast	600:1
Approvals	DNV GL, LR	Viewing angle	Horizontal -89° / +89° vertical -89° / +89°
		Required distance to compass	Steering magnetic compass: 0.80 m Standard magnetic compass: 1.30 m
		Item number	16351